


## PRODUCT DESCRIPTION

DURA♦SKRIM® R8BB and R8WB consist of two sheets of high-strength polyethylene film laminated together with a third layer of molten polyethylene. The white outer layer (DURA♦SKRIM® R8WB) contains UV inhibitors and thermal stabilizers and the black outer layer(s) contains carbon black to enhance outdoor life. The white outer surface is also designed to reduce heat build up and condensation. DURA♦SKRIM® is reinforced with a high strength scrim reinforcement laid in a diagonal pattern spaced 3/8" apart for uniform tear resistance in both machine and transverse directions.

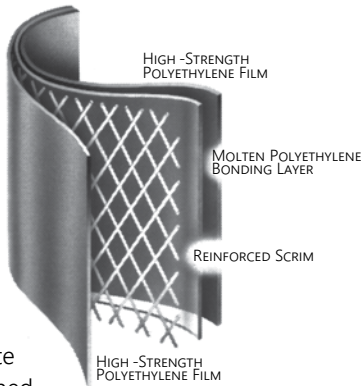

## PRODUCT USE

DURA♦SKRIM® R8BB and R8WB are used in more demanding applications requiring high tear resistance. Please inquire about DURA♦SKRIM® R8BV and R12BV for longer-term applications up to 5 years, meeting GRI-GM22 Standard Specifications for Scrim Reinforced Geomembranes Used in Exposed Temporary Applications.

## SIZE & PACKAGING

DURA♦SKRIM® R8BB and R8WB, are available in a variety of widths up to 180,000 square feet. All panels are manufactured in a quality controlled environment and are accordion folded and tightly rolled on a heavy-duty core for ease of handling and time-saving installation.



Temporary Rain Shed Cover

## PRODUCT

## PART #

DURA♦SKRIM® R8BB..... R8BBR

DURA♦SKRIM® R8WB..... R8WBK

## APPLICATIONS

- |                           |                              |
|---------------------------|------------------------------|
| Cargo Coverings           | Remediation Covers or Liners |
| Interim Landfill Covers   | Pit/Pond Liners              |
| Daily Landfill Covers     | Underslab Vapor Retarders    |
| Temporary Erosion Control | Temporary Earthen Liners     |
| Divider Curtains          | Temporary Rainshed Covers    |



# DURA♦SKRIM® 8BB & 8WB

FOUR-LAYER REINFORCED EXTRUSION LAMINATE

		DURA♦SKRIM® R8BBR / R8WBK	
		TYPICAL	
PROPERTIES	TEST METHOD	IMPERIAL	METRIC
APPEARANCE		Black/Black or White/Black	
THICKNESS, NOMINAL	ASTM D5199	8 Mil	0.20 mm
WEIGHT	ASTM D751	37 lbs/MSF	181 g/m <sup>2</sup>
CONSTRUCTION		Extrusion laminated with scrim reinforcement	
<sup>2</sup> GRAB TENSILE STRENGTH	ASTM D7004	80 lbs	356 N
<sup>2</sup> GRAB TENSILE ELONGATION	ASTM D7004	17 %	17 %
<sup>3</sup> TONGUE TEAR	ASTM D5884	30 lbs	133 N
CBR PUNCTURE RESISTANCE	ASTM D6241	200 lbs	890 N
MULLEN BURST	ASTM D751	78 psi	538 kPa
WVTR	ASTM E96	0.016 grains/ft <sup>2</sup> •hr	0.268 g/m <sup>2</sup> •day
PERM RATING	ASTM E96	0.039 Perms	0.026 g/m <sup>2</sup> •day•mm Hg
HYDRAULIC CONDUCTIVITY	ASTM E96	3.14x10 <sup>-10</sup> cm/sec	
MAXIMUM STATIC USE TEMPERATURE		180° F	82° C
MINIMUM STATIC USE TEMPERATURE		-70° F	-57° C

<sup>2</sup> Tests are an average of primary reinforcement directions.

<sup>3</sup> Tests are an average of machine and transverse directions.



DURA♦SKRIM® R8BB and R8WB consist of two sheets of high-strength polyethylene film laminated together with a third layer of molten polyethylene. The white outer layer (DURA♦SKRIM® R8WB) contains UV inhibitors and thermal stabilizers and the black outer layer(s) contains carbon black to enhance outdoor life. The white outer surface is also designed to reduce heat build up and condensation. DURA♦SKRIM® is reinforced with a high strength scrim reinforcement laid in a diagonal pattern spaced 3/8" apart for uniform tear resistance in both machine and transverse directions.



Scan QR Code to download technical data sheets.

Note: To the best of our knowledge, unless otherwise stated, these are typical property values and are intended as guides only, not as specification limits. Chemical resistance, odor transmission, longevity as well as other performance criteria is not implied or given and actual testing must be performed for applicability in specific applications and/or conditions. RAVEN INDUSTRIES MAKES NO WARRANTIES AS TO THE FITNESS FOR A SPECIFIC USE OR MERCHANTABILITY OF PRODUCTS REFERRED TO, no guarantee of satisfactory results from reliance upon contained information or recommendations and disclaims all liability for resulting loss or damage. Limited Warranty available at [www.RavenEFD.com](http://www.RavenEFD.com)

**RAVEN ENGINEERED FILMS**  
 P.O. Box 5107 Sioux Falls, SD 57117-5107  
 Ph: +1 (605) 335-0174 • TF: +1 (800) 635-3456

© 2017 RAVEN INDUSTRIES INC. All rights reserved.

[efdsales@ravenind.com](mailto:efdsales@ravenind.com)  
[www.ravenefd.com](http://www.ravenefd.com)



062817 EFD 1076